

MASONRY DRILL BITS

Masonry Drill Bit


Carbide-tipped, spiral grooved-type steel bit is for use in portable, rotary-driven power drills for concrete and other masonry work. For right-hand cutting. Has a straight, rounded shank.

Made of solid, coreless stock with a corrosion-resistant coating. GGG-D-650.

| | | | |
|------------------|--|----|--------|
| 5130-00-245-2661 | 1/4" diameter, 15/64" shank, 4" length | EA | \$0.80 |
| 5130-00-245-2663 | 3/8" diameter, 1/4" shank, 4" length | EA | \$1.50 |

TROWELS

Trowel - Mastic

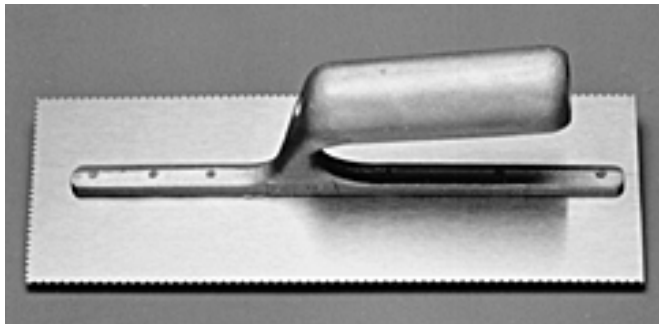


Mastic trowel is for spreading mastic material for laying asphalt tile. High-carbon tool steel blade is smoothly ground. Blade has U- or V-shaped notches along the front end and on one or both sides. Has an aluminum, plastic or wooden handle with riveted handle mounting. Measures 10-1/2" long, 4-1/2" wide and has a 4-1/2" handle. GGG-T-671.

| | | |
|------------------|----|--------|
| 5120-00-540-0754 | EA | \$8.61 |
|------------------|----|--------|

CALIPERS

Dial Caliper

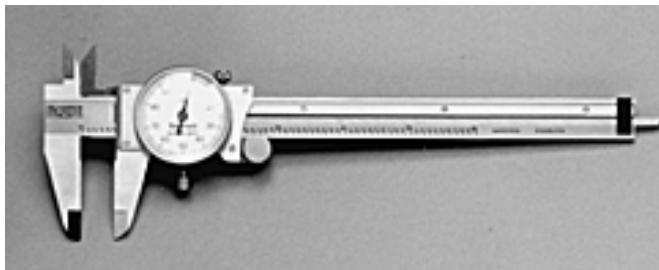

Use for inside, outside and depth measurements. Caliper has 0 to 6" range. Dial has 0.001" graduations, and bar has 0.100" graduations. Shockproof dial protects against damage. Stainless steel. Comes with a case. LS Starrett P/N 120Z-6 or equal.

| | | |
|------------------|----|----------|
| 5210-01-010-4522 | EA | \$125.59 |
|------------------|----|----------|

Outside Micrometer Caliper



Heat-treated steel tool obtains precise outside measurements. Has hardened and ground measuring faces. Consists of steel or iron frame, micrometer screw spindle, anvil, barrel and thimble, adjusting nut, spindle locknut (clamp ring) and knurled ratchet or friction stop. Thimble and barrel have a chrome-plated, nonglare (dull) finish. Adjusting nut compensates for wear. Wooden or vinyl-covered metal case included. Enamelled frame may be of various construction, having either a smooth or rippled finish. Beveled barrel and knurled thimble are marked with clear graduations. GGG-C-105.

Caliper has a solid anvil and 0.0001" graduations.

| | | | |
|------------------|---------------|----|----------|
| 5210-00-540-2973 | 0 to 1" range | EA | \$64.50 |
| 5210-00-243-2933 | 1 to 2" range | EA | \$70.98 |
| 5210-00-221-1934 | 3 to 4" range | EA | \$99.31 |
| 5210-00-221-1948 | 5 to 6" range | EA | \$111.99 |

Outside Micrometer Caliper Set



Steel set has solid anvils and .0001" graduations. Equipped with an enamelled I-beam or hollow tubular frame, as well as a spindle locknut and a ratchet or friction stop. A carrying case is included. GGG-C-105.

Set consists of six calipers. One disk and five rod standards are included for maintaining zero setting.

| | | | |
|------------------|---------------|----|----------|
| 5210-00-554-7134 | 0 to 6" range | SE | \$543.56 |
|------------------|---------------|----|----------|

Outside Micrometer Caliper Set (Metric)

Steel set has solid anvils and 0.01mm graduations. Equipped with an enamelled I-beam or hollow tubular frame, a spindle locknut and a friction stop. Set consists of six calipers with carrying case. One disk and five rod standards are included for maintaining zero setting.

| | | | |
|------------------|-------------------|----|----------|
| 5210-01-117-0468 | 0 to 150 mm range | SE | \$509.37 |
|------------------|-------------------|----|----------|